


MAILBOXES

Our CC&Rs provide considerable latitude when it comes to our mailboxes. There are, however, USPS standards, quoted below, that we must adhere to. This is to facilitate the access to boxes by USPS delivery people in vehicles.

“Generally mail boxes are installed at a height of 41-45 in. from the road surface to inside floor of the mail box or point of mail entry (locked designs) and are set back 6-8 in. from front face of curb or road edge to the mailbox door.”

In addition, we require that all mailbox posts be topped with a lamp. These are our only street lights.

This is a photograph of a typical mailbox and light pole in our community that has been annotated to reflect the above standard placement:

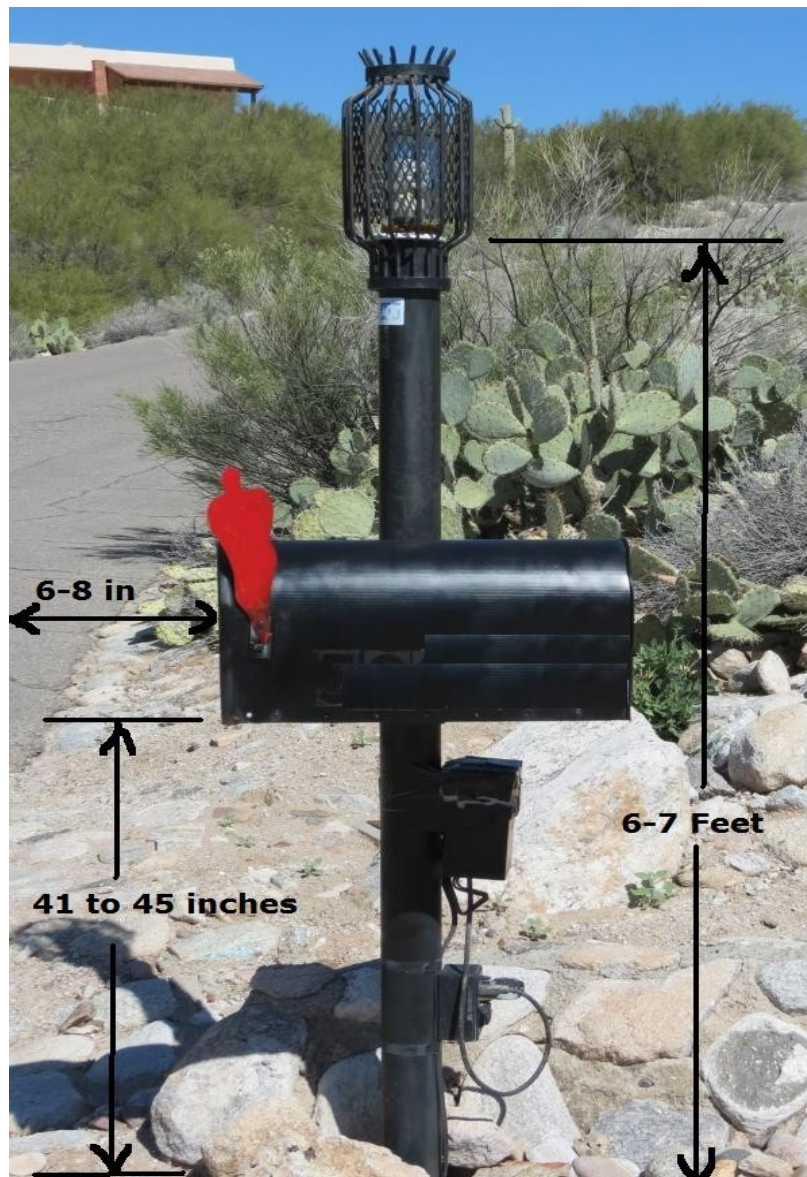

When installing or replacing a mailbox and light pole, you may find that the basket top illustrated above is no longer available. The following are photographs of lighting substitutes that have proven to be acceptable. The final design you choose must be approved by the Association's Architectural Control Committee before it is installed.



Note: In the photos above, the poles and boxes were initially painted black. They have faded in the sun.